

# Screw-on Hinge


4256、4258、4264

# Screw-on Hinge

4270


Index

Hinges

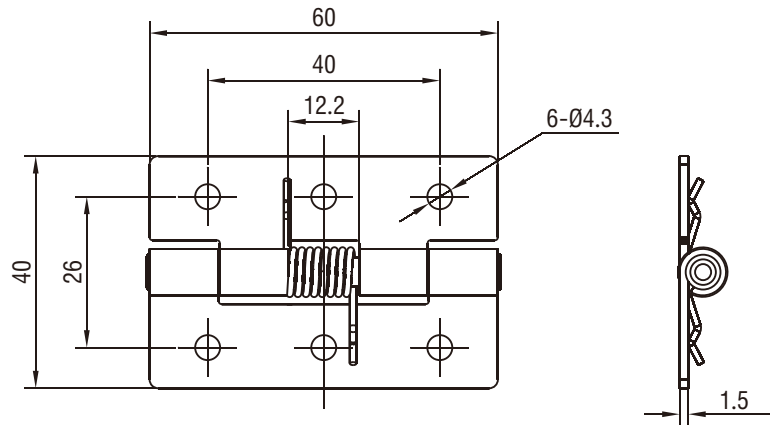



SUS304 Material

|        |               |
|--------|---------------|
| SUS304 | 4256-1200-608 |
|--------|---------------|

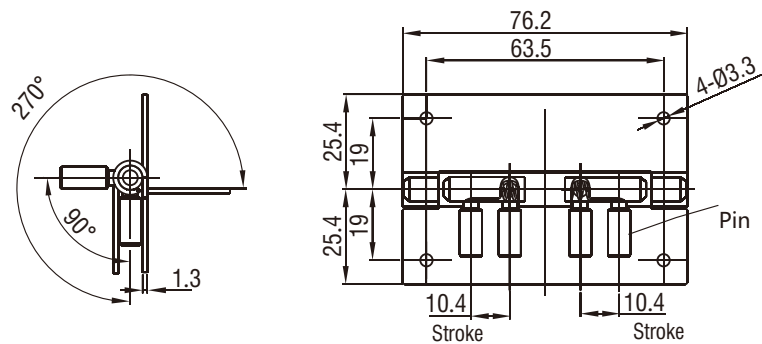

M.S. zinc plated or stainless steel

|               |              |
|---------------|--------------|
| SUS304        | Steel        |
| 4258-1524-608 | 4258-1524-02 |


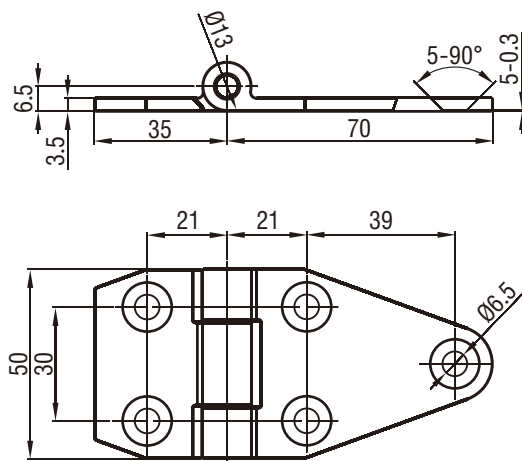



Steel Casting

|                            |              |
|----------------------------|--------------|
| Steel casting, zinc plated | 4264-1000-02 |
|----------------------------|--------------|

Index

Hinges

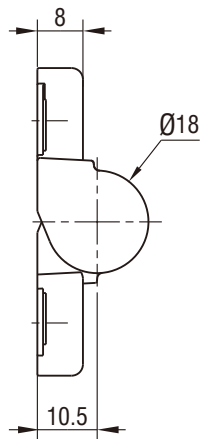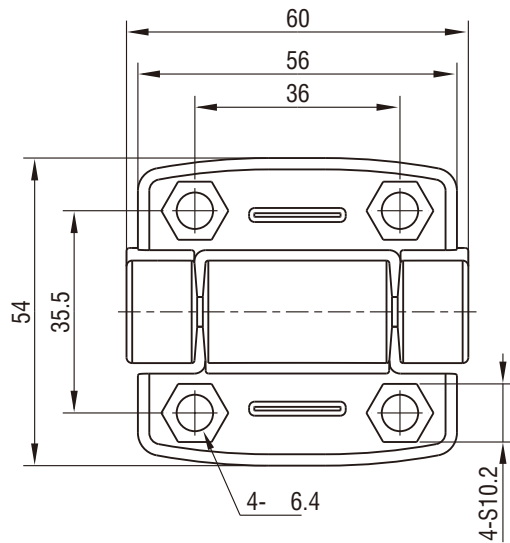

PA6+30%GF, Black, bearing steel

| N.m Asymmetric N.m |                    |                 |
|--------------------|--------------------|-----------------|
| Forward Torque N.m | Reverse Torque N.m | PA Black        |
| 2.3                | 0.3                | 4270-12046F-180 |
| 0.3                | 2.3                | 4270-12006R-180 |

Technical requirements:  
1. Within 20% of torque specification  
2. Within 20,000 cycles static torque stay