

Screw-on Hinge


4256、4258、4264

Screw-on Hinge

4270


Index

Hinges

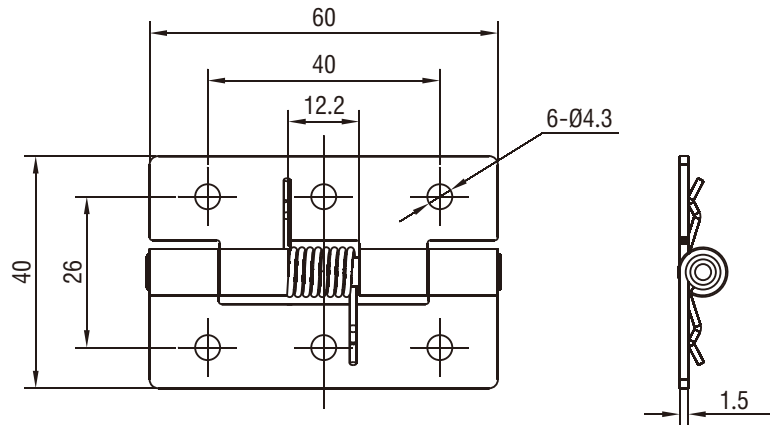



SUS304 Material

SUS304	4256-1200-608
--------	---------------

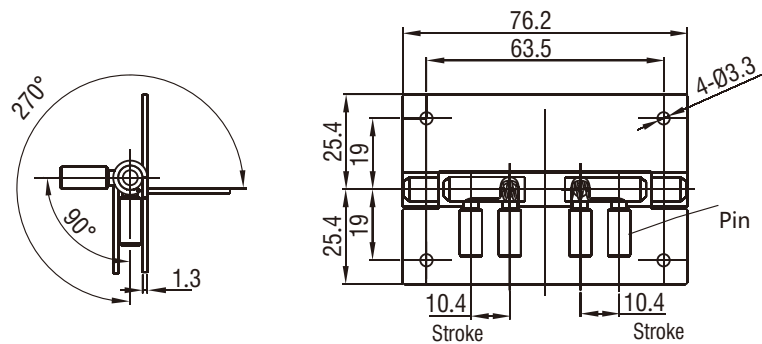

M.S. zinc plated or stainless steel

SUS304	Steel
4258-1524-608	4258-1524-02


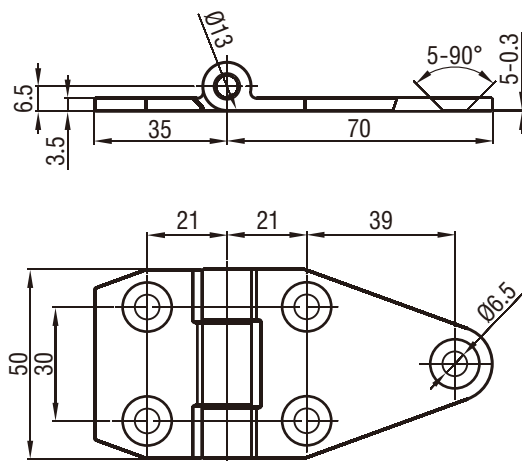



Steel Casting

Steel casting, zinc plated	4264-1000-02
----------------------------	--------------

Index

Hinges

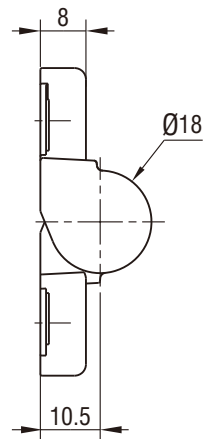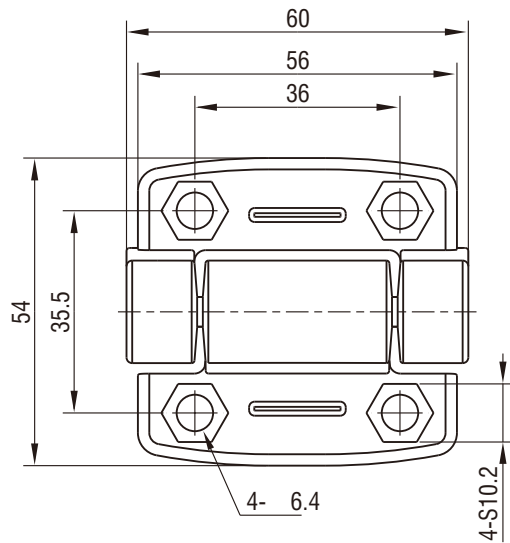

PA6+30%GF, Black, bearing steel

N.m Asymmetric N.m		
Forward Torque N.m	Reverse Torque N.m	PA Black
2.3	0.3	4270-12046F-180
0.3	2.3	4270-12006R-180

Technical requirements:
1. Within 20% of torque specification
2. Within 20,000 cycles static torque stay